



# Intellicall - Astratel 2 Instant Flex ANI Test Program Instructions

## Calling an Individual Payphone for an Instant Response

### PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING THIS PROGRAM.


**NOTE:** The Instant Flex ANI Test Program requires the use of a timed call home feature. If you have payphone locations that cannot be dialed directly, (behind a PBX, auto dialer, etc.), and they require the ability to call back at a predetermined time of day, **DO NOT** use this program on those payphones. If you make the following changes to those payphones, they will discontinue calling home and you will be required to reset each payphone from the payphone's location to allow it to start calling back again. If you have further questions or need more explanation, please contact our office at 1-877-211-9901.

#### Programming Instructions:


1. Edit the .PAC files to **activate** Instant Flex Ani Test Program.
2. Download the payphone to **activate** the Instant Flex Ani Test Program.
3. Wait for test to occur.
4. Edit the .PAC files to **deactivate** the Instant Flex ANI Test Program.
5. Download the payphone to **deactivate** the Instant Flex Ani Test Program.

#### 1. Make Changes to the .PAC File to Activate.


- 1a. Click on 'Outputpulse Rules'.
- 1b. Select an Outputpulse Rule to set up. (Our example is using OPR 10)
- 1c. Click on the white area to the right of the OPR to reveal a drop-down arrow.

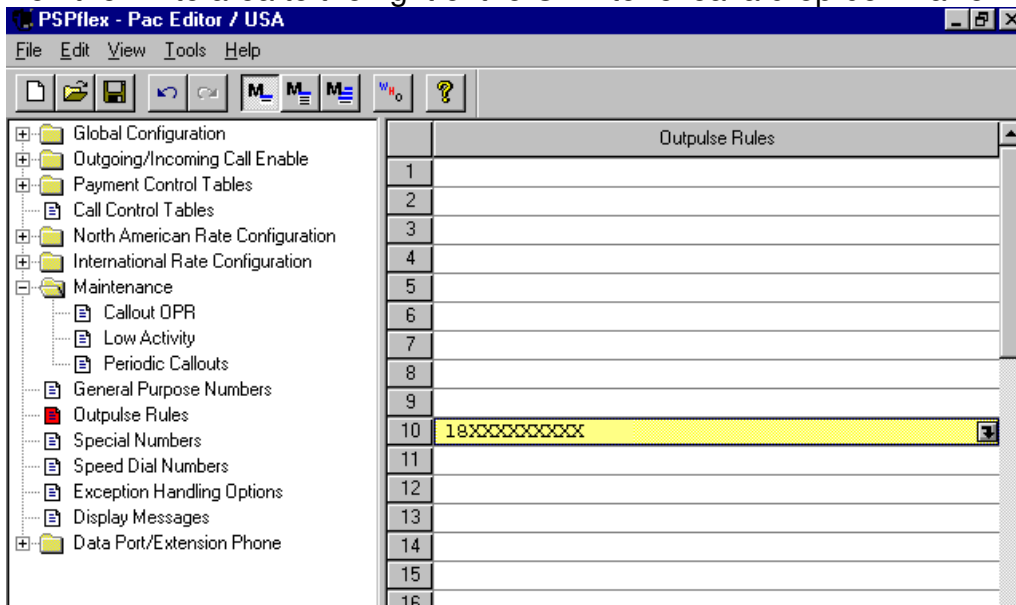

- 1d. Click on the **drop-down arrow** to reveal the OPR editor.
- 1e. Click the **drop-down arrow** in the white box below 'Command' and to the right of '1' to reveal a list of Outpulse Rule commands.
- 1f. Select '**Dial Digits**'.
- 1g. In the '**Parameters**' box, enter 18XXXXXXXXX (*replace with the toll free we provide for you. Remember, Instant and Mass AutoFlexANI tests use different toll frees*).

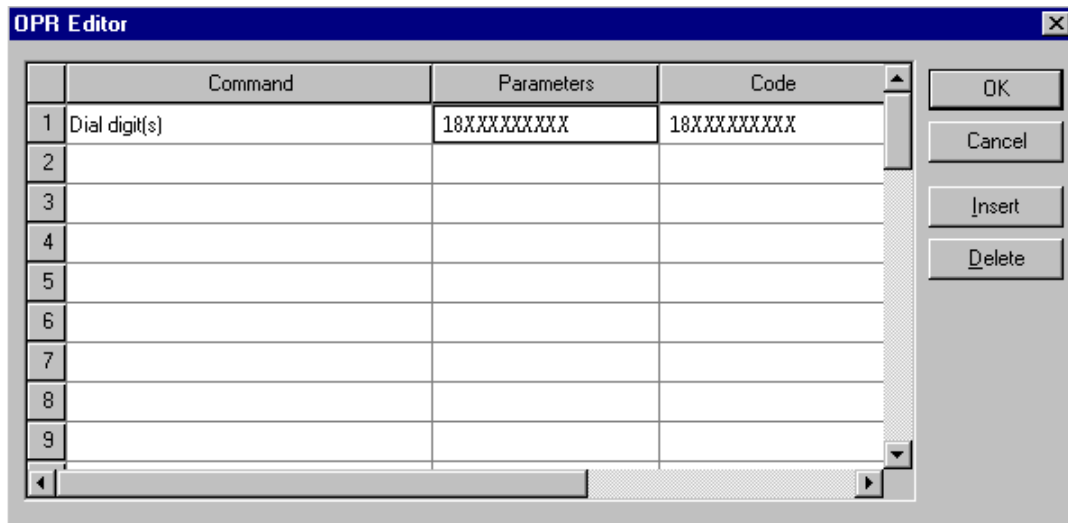


- 1h. Click '**OK**' to return to the OPR list.
- 1i. Click on the **+** to the left of '**Maintenance**' to reveal three options below.
- 1j. Click on '**Call Out OPR**'.
- 1k. From the list presented, click on the box and **enter the OPR you created** in steps 1b thru 1h next to the callout type, '**Timed callout**'. (Our example uses OPR 10 as shown below)

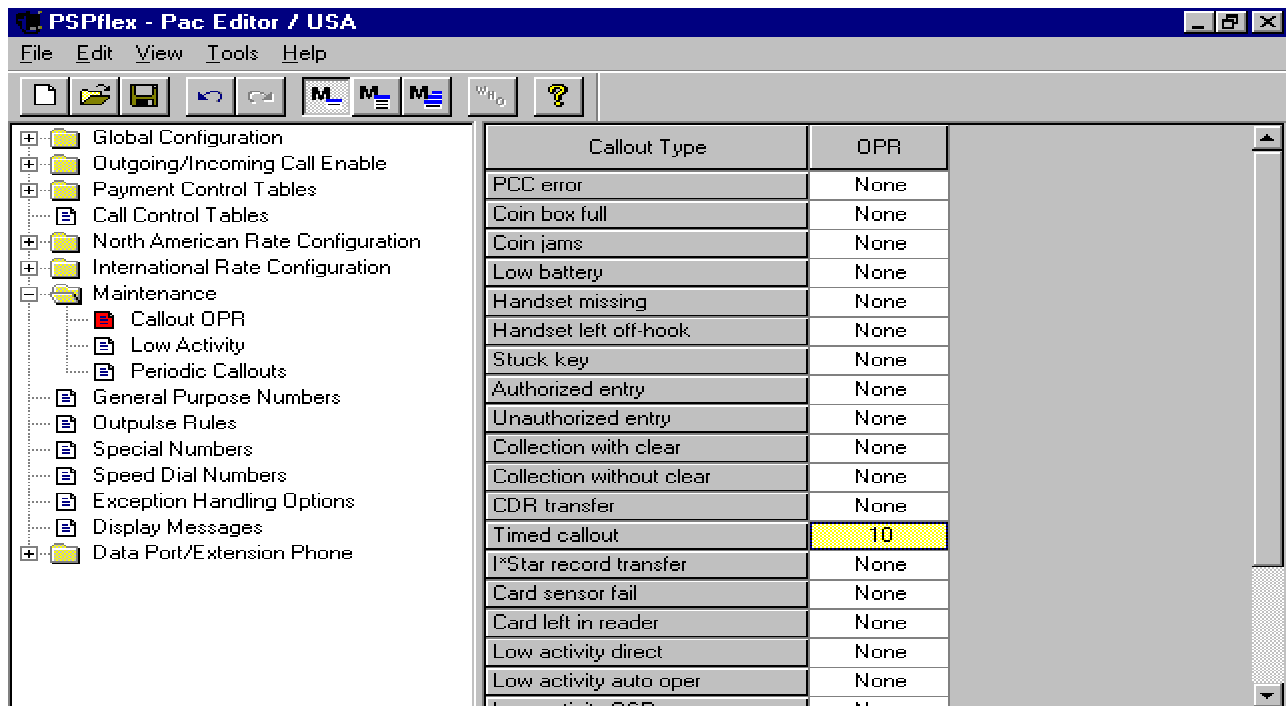

- 1l. Click '**Periodic Callouts**' on the left under Maintenance.
- 1m. Select a time you want the phone to call our Instant Flex ANI access number.

- 1n. Check mark any day you wish to allow the phones to call out as long as it is more than 12 hours from the time the download is completed.

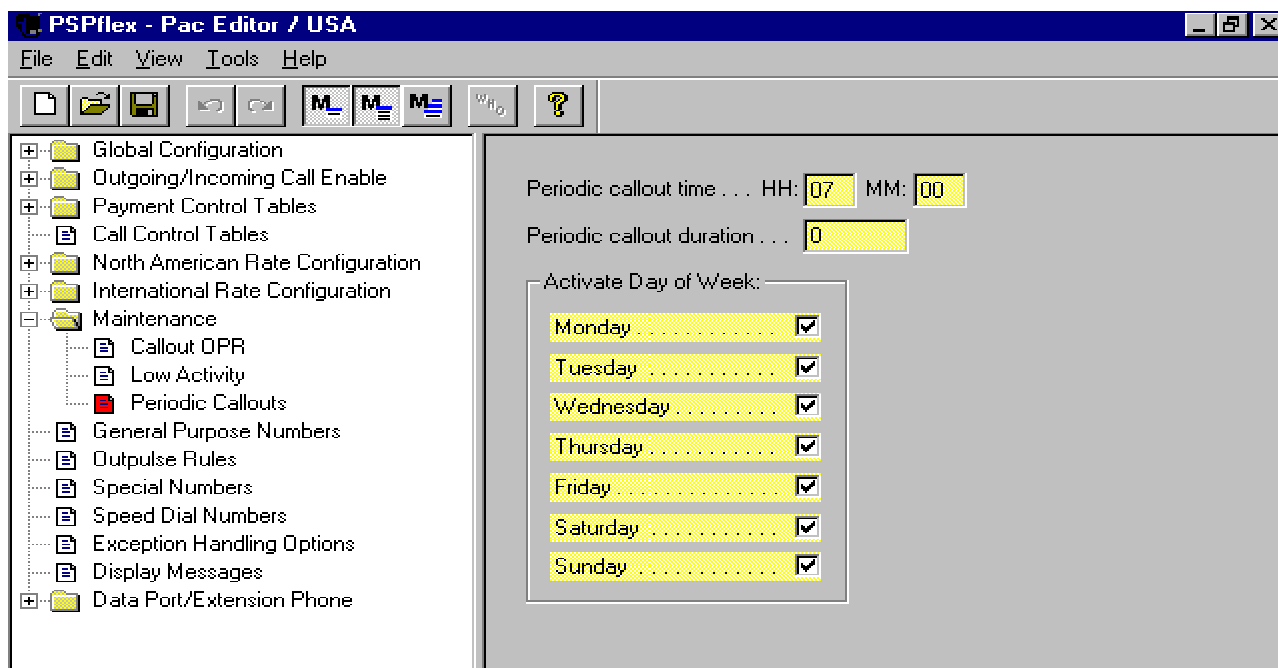

- 1o. Save all changes.

## **2. Download .PAC Files of Saved Changes to the Payphone to Activate the Test.**

### **3. Wait for Test to Occur.**

- 3a. Once the download has taken place, a full 12 hours must pass before the call home clock begins to function.
- 3b. You will receive an email report within an hour of the payphone calling our access number. For every call that reaches our network, you will be emailed a report. You may wish to wait until our report is emailed to you before proceeding to step 4. If your phone didn't call out, you may need to wait another 24 hours in case several phones were calling our access number simultaneously.

### **4. Make Changes to the .PAC File to Deactivate.**

- 4a. Click 'Call Out OPR' within the Maintenance folder.
- 4b.. From the list presented, click on the box and type 'N' for **NONE** within the OPR column next to the callout type, 'Timed callout'.
- 4c. Save all changes.

## **5. Download .PAC Files of Saved Changes to the Payphone to Deactivate the Program.**

.....

You have completed the steps to produce a test from your payphone to the Instant Flex ANI Test Number. You will receive an email confirmation of your test call results within one hour of the completed test.

If you have any questions, or need further assistance, please contact our office at: 1-877-211-9901. Thank you for your interest in our program.